

PARTS LIST




2026.06.18

NILFISK

TABLE OF CONTENTS


Connection plate 7	1
Cylinder block 7	3
Default accessories	5
Electrical components 18H	7
Electrical components 36H, 54H	9
Heating tank	12
Motor 7	14
Overview 1	17
Overview 2	19
Recommended spare parts	21
Unloader 7 (a)	24
Unloader 7 (b)	26

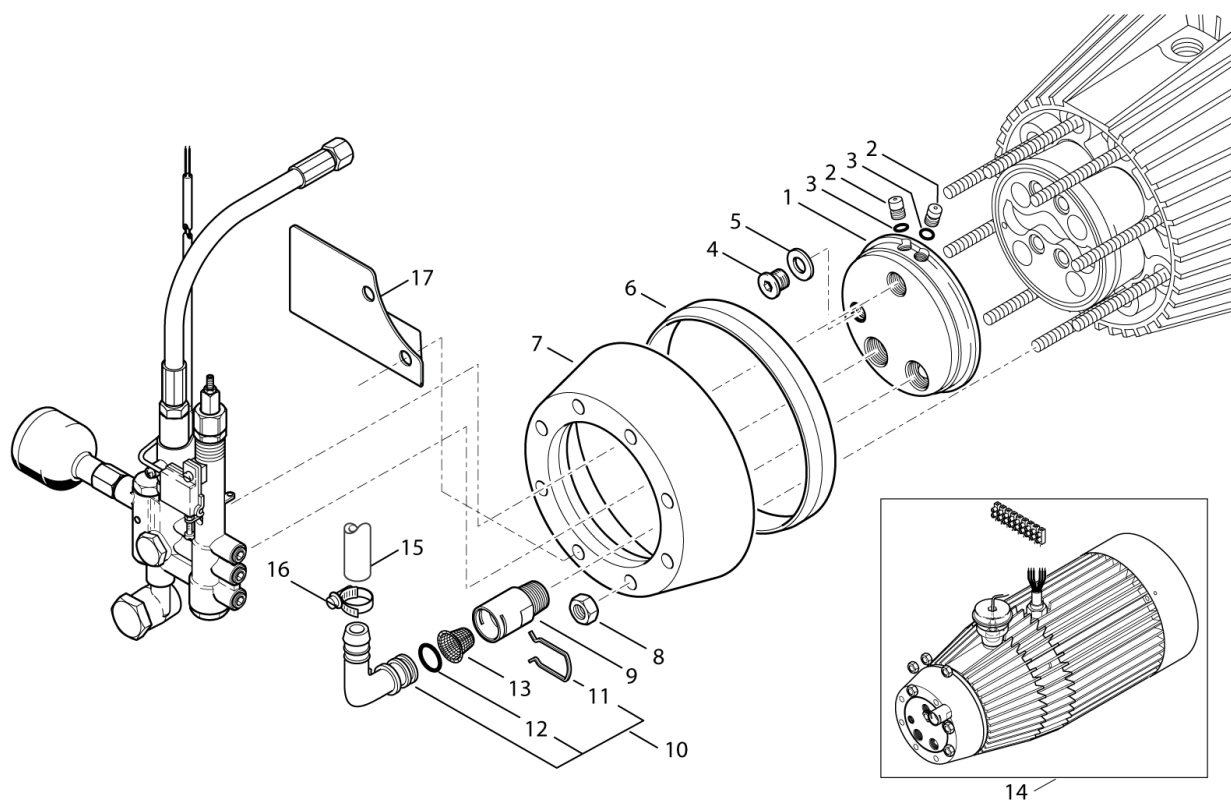

Pos.	Réf article	Qté	Désignation	Notes
01	107121500	1	PLAQUE INTERNE POMPE	
02	107121501	2	BOUCHON	
03	3000270	2	JOINT TORIQUE	
04	6180660	1	BOUCHON	
05	3001740	1	JOINT TORIQUE 7.66X1.78	
06	6301392	1	ANNEAU ENTRETOISE	
07	6100602	1	FLAQUE AVANT POMPE	
08	1800465	8	ECROU M10 DIN 934	
09	107121502	1	RACCORD ENTREE EAU	
10	1119210	1	RACCORD EN ÉQUERRE	
11	6180661	1	CLIP	
12	3004226	1	JOINT TORIQUE 13.0X3.0	
13	107312039	1	FILTRE	
14	107310010	1	MOTEUR POMPE POUR 7-63D	[1]
14	107310001	1	MOTEUR DE POMPE	[2]
14	107310000	1	GROUPE MOTO-POMPE	[3]
14	107310002	1	GROUPE MOTO POMPE SOLAR 7-37 7-38E	[4]
15	106408242	1	TUBE DE 2M -5/8	
16	8298	1	COLLIER 16-27	
17	107318139	1	BRACKET FOR C3	

Part Notes:

- [1] - for 7-63D
- [2] - for 7-51D, 7-51GH and 7-52GH
- [3] - for 7-57 and 7-58D, 7-58E, 7-58G
- [4] - for 7-37E and 7-38E

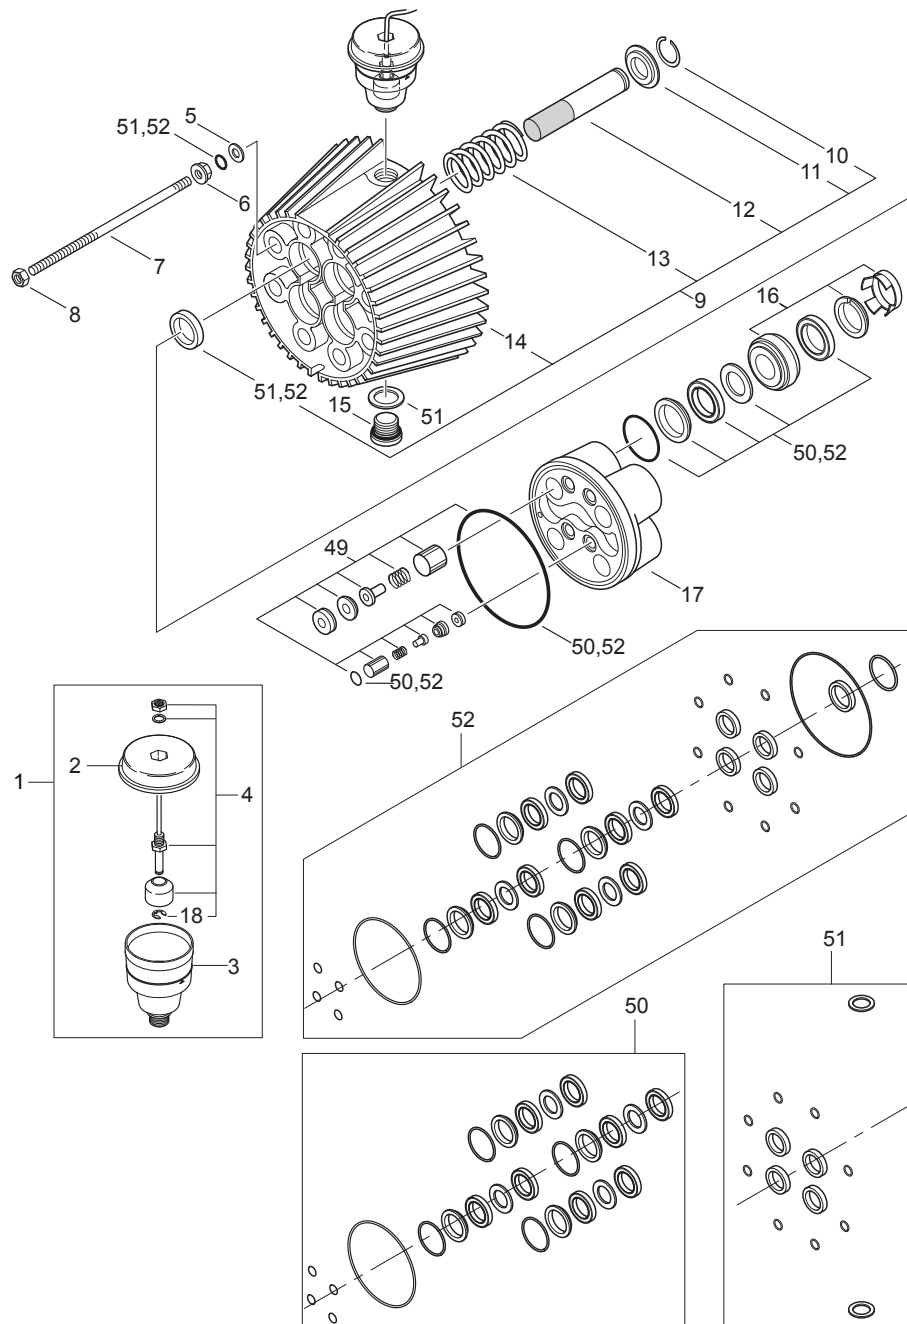

Pos.	Réf article	Qté	Désignation	Notes
	31001229	1	HUILE ALPHASYN T150 - 20 LITRES	
0-	5218433	1	HUILE ALPHASYN T150 - 1 LITRES	[1]
1	301000616	1	RESERVOIR AVEC JAUGE DE NIVEAU HUILE	
2	301000615	1	COUVERCLE	
3	301000614	1	RÉSERVOIR D'HUILE	
4	301001196	1	INTERRUPTEUR À FLOTTEUR	
5	6100718	8	RONDELLE D16X10X1	
6	6100719	8	ECROU	
7	6301368	8	GOIJON	
8	1800465	8	ECROU M10 DIN 934	
9	6300071	1	CARTER CYLINDRE. COMPLET	
10	1802529	4	CIRCLIP D24	
11	6100666	4	BAGUE RESSORT PISTON	
12	6301166	4	PISTON CERAMIQUE	
13	102602517	4	RESSORT PISTON	
14	6100610	1	CARTER CYLINDRE	
15	6150400	1	BOUCHON DE VIDANGE	
16	101119850	4	KIT JOINT HP 1 UNITE	
17	107120701	1	CORPS DE CLAPET	
18	107142593	1	CLIPS	[2]
49	1119195	1	KIT CLAPETS	
50	1119571	1	KIT JOINT D'EAU REDUIT	[3]
51	1119820	1	KIT JOINT D'HUILE	
52	1119570	1	KIT JOINT EAU & HUILE	[3]

Part Notes:

- [1] - 1,1 l - OIL TYPES_QUANTITY for HPW_APRIL 2017
- [2] - TSB-PPW-2016-017 Locking ring for oil level switch falling off
- [3] - TSB-PPW-2016-011 Rep kit 1119571 and 1119570 potential have wrong O-ring in kit
DE TSB-PPW-2016-011 Rep Kit 1119571 und 1119570 beinhalten möglicherweise einen falschen O-Ring


**No
Diagram
Available**

**Parts List
Only**

Pos.	Réf article	Qté	Désignation	Notes
0-	101119742	1	BUSE TORNADO PLUS 0530	[1]
0-	101119747	1	BUSE TORNADO PLUS 0680	[2]
0-	107370955	1	ACCESSOIRE PROTECTION ANTI-GEL DELUX	[3]
0-	107370954	1	ACCESSOIRE PROTECTION ANTI-GEL	[3]
	107370962	1	OPTION CHASSIS + CAPOT INOX SH SOLAR D/E	

Part Notes:


- [1] - 7-38E
- [2] - 7-58E
- [3] - Frost protection - ANTI FROST

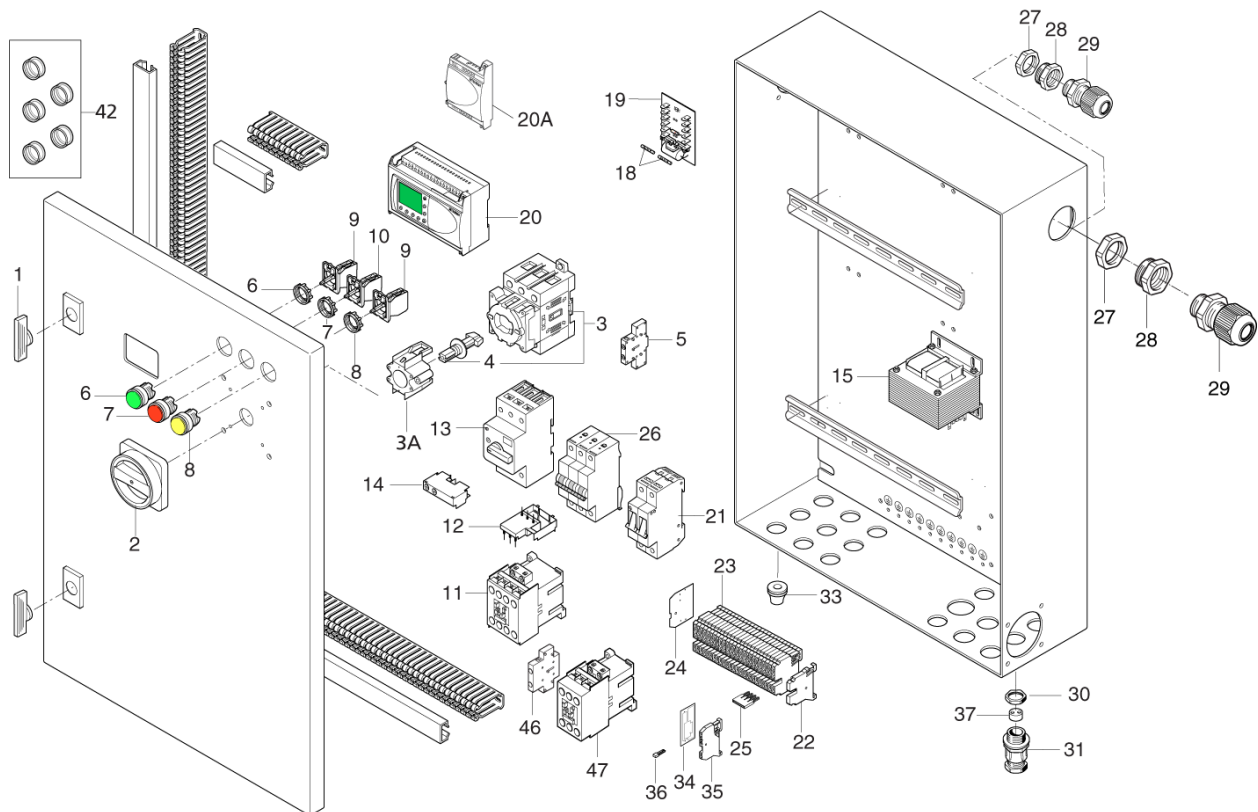

Pos.	Réf article	Qté	Désignation	Notes
01	103821959	1	KEY	
02	3830121	1	BOUTON INTERRUPTEUR	
03	103821908	1	INTERRUPTEUR PRINCIPAL	
03A	103821907	3	SHAFT FOR MAIN SWITCH 194L-G2853	
04	103821961	1	AXE DE CONTACTEUR M/A 100A	
05	107318225	1	CONTACT AUXILIAIRE 194E-A-PD10	
06	103821823	1	BOUTON. VERT	
07	103821824	1	BOUTON. ROUGE	
08	103821900	1	BOUTON. JAUNE	
09	103821825	1	CONTACT FERMETURE	
10	103821826	1	CONTACT OUVERTURE	
11	103822317	1	CONTACTEUR CJX2-D32-B7 24	
11	103822306	1	CONTACTEUR 24V POUR MONOPH. CJX2-D18-B7	
12	103821899	1	CONNEXION	
13	103821898	1	DISJONCTEUR 10-16A	[1]
13	3817319	1	INTERRUPTEUR KTA3-25-16	[2]
14	103823032	1	AUXILIARY CONTACT 140MT-C-AFAR10A01	
15	103821846	1	TRANSFORMATEUR 400V 24/19	
18	3812385	1	FUSIBLE FIN 6,3 A	
19	106420051	1	CIRCUIT IMPRIME	
20	106426055	1	PLC SOLAR E	
20A	103821948	1	CONTACT ADDITIONNEL AL2-4EYR	
21	103821905	1	SECUTITE AUTOMATIQUE	
22	103821922	6	SUPPORT DE BORNIER	
23	103821920	27	BORNIER	
24	103821921	1	PLAQUE A BORNES	
25	103821924	2	CAVALIER 4 POLES	
26	107318096	1	DISJONCTEUR 3P 32A 10KA	
27	103821832	1	NUT M25X1.5 PA/L GREY	[3]
27	103821842	1	ECROU	
28	103821874	1	REDUCTEUR M40/M25	
29	103821831	1	RACCORD FILETE	
29	103821872	1	RACCORD FILETE	[3]
30	103821778	4	ECROU M20X1.5	
31	103821785	4	SERRE CABLE	
33	3803780	9	DOUILLE	
34	107307392	1	END PLATE 4Q WAGO 2004-1291	
35	107307394	6	BORNIER TERMINAL 4Q WAGO 2004-1201	
36	103821969	2	PONT	
37	103821942	1	INSERT 2X4	
37	103821946	1	INSERT 3X6.5	
42	107318028	1	LOT DE 5 CAPUCHONS	
46	3821748	1	BOUTON AUXILIAIRE	[2]
47	103822317	1	CONTACTEUR CJX2-D32-B7 24	

Part Notes:


- [1] - From week 34 2009
- [2] - Up to week 34 2009
- [3] - OPTION

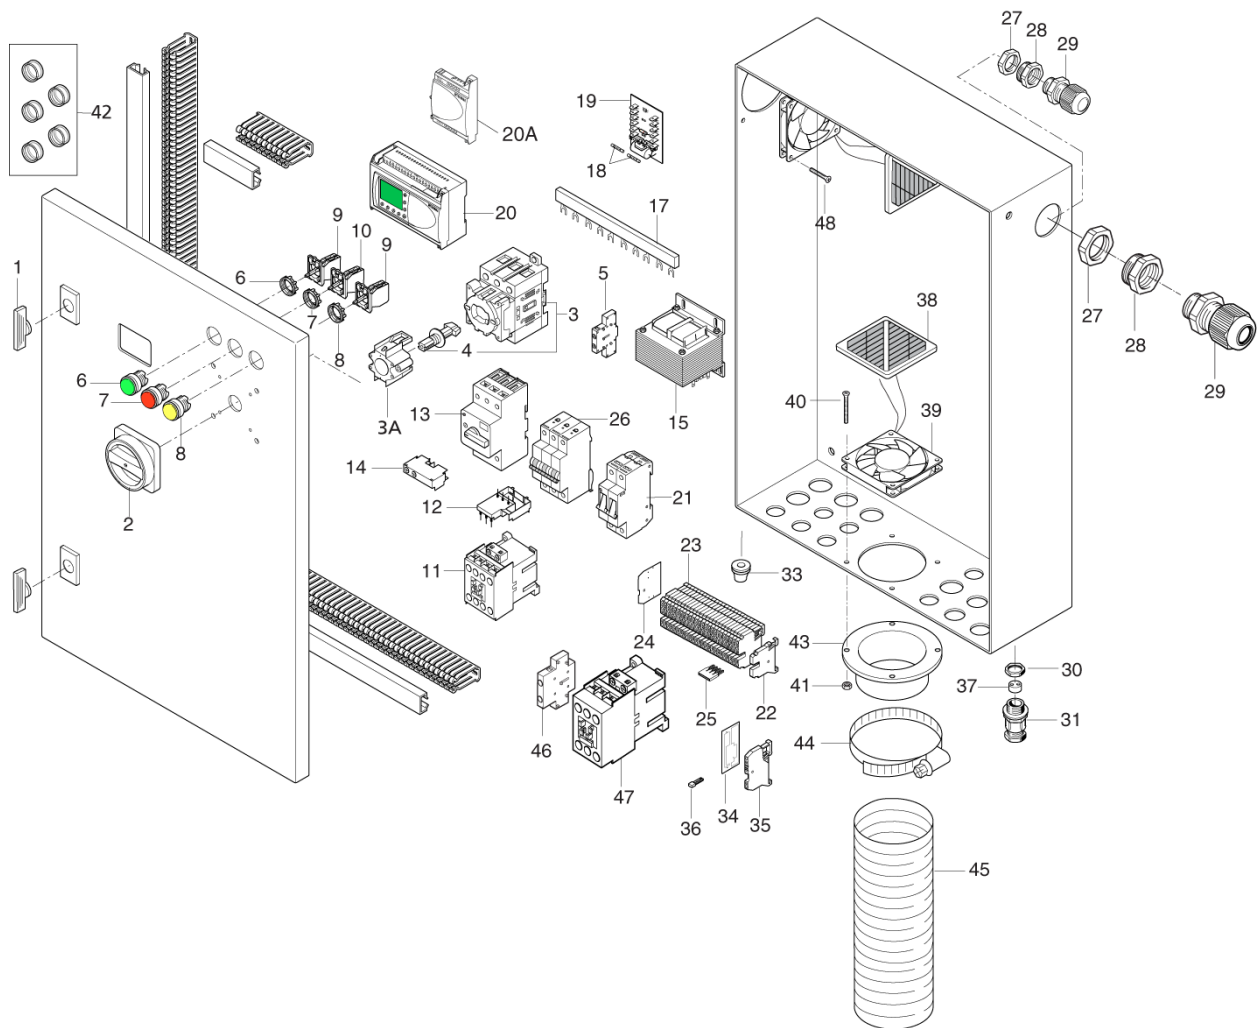

Pos.	Réf article	Qté	Désignation	Notes
01	103821959	2	KEY	
02	3830121	1	BOUTON INTERRUPTEUR	
03	103821895	1	INTERRUPTEUR PRINCIPAL	
03	103821908	1	INTERRUPTEUR PRINCIPAL	
03A	103821907	3	SHAFT FOR MAIN SWITCH 194L-G2853	
04	103821961	1	AXE DE CONTACTEUR M/A 100A	
05	107318225	1	CONTACT AUXILIAIRE 194E-A-PD10	
06	103821823	1	BOUTON. VERT	
07	103821824	1	BOUTON. ROUGE	
08	103821900	1	BOUTON. JAUNE	
09	103821825	2	CONTACT FERMETURE	
10	103821826	1	CONTACT OUVERTURE	
11	103822317	1	CONTACTEUR CJX2-D32-B7 24	
11	103822306	1	CONTACTEUR 24V POUR MONOPH. CJX2-D18-B7	
12	103821899	1	CONNEXION	
13	103821898	1	DISJONCTEUR 10-16A	[1]
13	3817319	1	INTERRUPTEUR KTA3-25-16	[2]
14	103823032	1	AUXILIARY CONTACT 140MT-C-AFAR10A01	
15	103821847	1	TRANSFORMATEUR	
15	103821846	1	TRANSFORMATEUR 400V 24/19	
17	107318106	1	JUMPER RAIL 9-MODULE	[3]
17	107318105	1	JUMPER RAIL 6-MODULE	[4]
18	3812385	2	FUSIBLE FIN 6,3 A	
19	106420051	1	CIRCUIT IMPRIME	
20	106426055	1	PLC SOLAR E	
20A	103821948	1	CONTACT ADDITIONNEL AL2-4EYR	
21	103821905	1	SECUTITE AUTOMATIQUE	
22	103821922	6	SUPPORT DE BORNIER	
23	103821920	27	BORNIER	
24	103821921	1	PLAQUE A BORNES	
25	103821924	2	CAVALIER 4 POLES	
26	107318096	3	DISJONCTEUR 3P 32A 10KA	[5]
27	103821842	1	ECROU	
27	103821832	1	NUT M25X1.5 PA/L GREY	[6]
28	103821874	1	REDUCTEUR M40/M25	
29	103821872	1	RACCORD FILETE	[6]
29	103821831	1	RACCORD FILETE	
30	103821778	4	ECROU M20X1.5	
31	103821785	4	SERRE CABLE	
33	3803780	9	DOUILLE	
34	107307392	1	END PLATE 4Q WAGO 2004-1291	
35	107307394	6	BORNIER TERMINAL 4Q WAGO 2004-1201	
36	103821969	2	PONT	
37	103821942	1	INSERT 2X4	
37	103821946	1	INSERT 3X6.5	
38	107318098	2	GRILLE	
39	107318099	2	VENTILATEUR 80X80X25 24V	
40	107318103	4	SCREW M4X40 DIN965-A	
41	1800127	8	ECROU	
42	107318028	1	LOT DE 5 CAPUCHONS	
43	107318100	1	FLANGE FOR EL-BOX	
44	107318102	1	HOSE CLAMP 71-95MM	
45	107318101	1	FLEXIBLE HOSE D90 L 250MM	
46	3821748	1	BOUTON AUXILIAIRE	[2]
47	103822317	3	CONTACTEUR CJX2-D32-B7 24	[5]
48	107318083	4	SCREW M4X35 DIN965-A 4X	

Part Notes:

- [1] - From week 34 2009
- [2] - Up to week 34 2009
- [3] - 54H
- [4] - 36H
- [5] - 2 pcs. 36H, 3 pcs. 54H
- [6] - OPTION

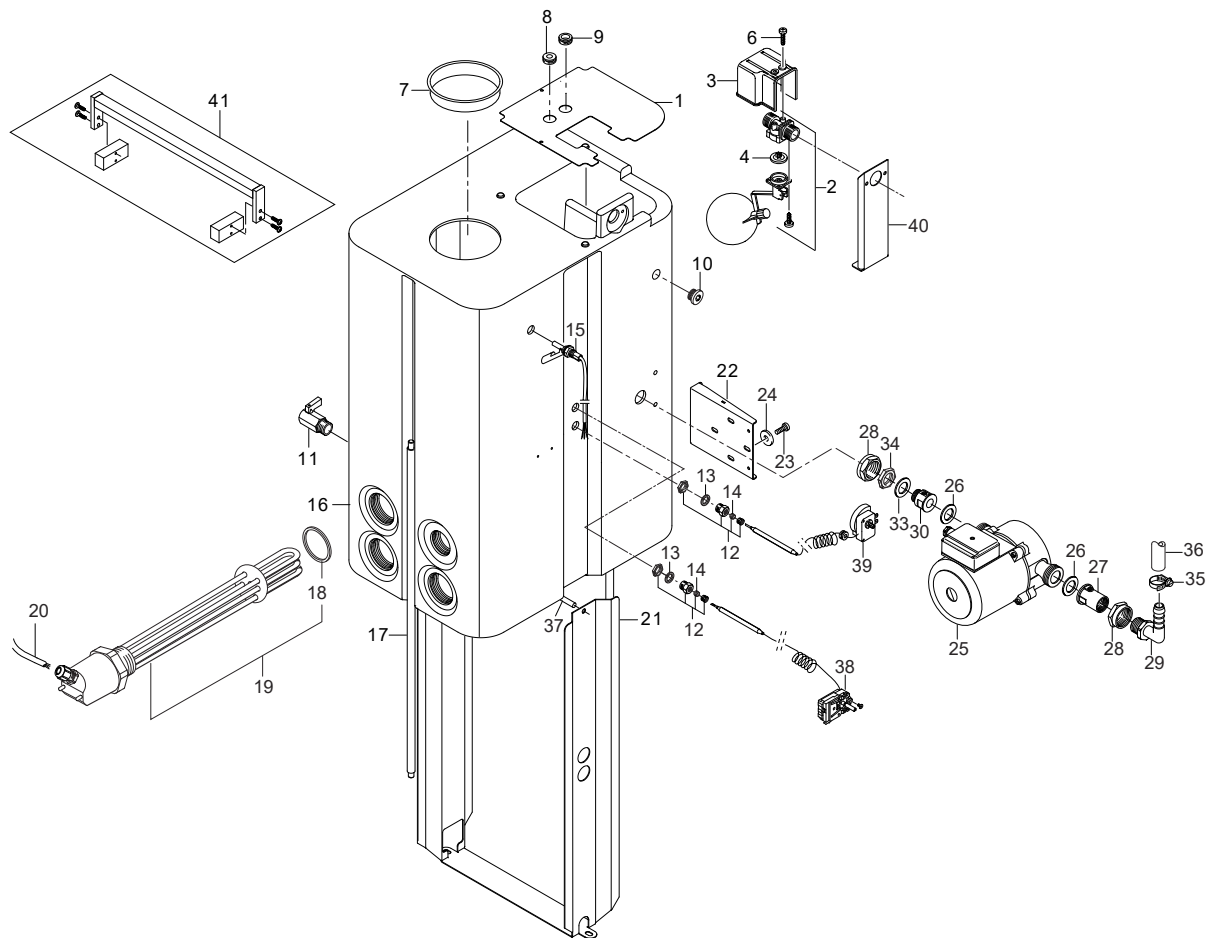

Pos.	Réf article	Qté	Désignation	Notes
1	107318114	1	COVER FOR WATERTANK	
2	63871	1	VALVE FLOTTEUR	
3	34240	1	RECOUVREMENT	
4	17379	1	MEMBRANE	
6	16860	2	VIS AUTOTARAUEUSE	
7	104601176	1	COUVERCLE BAC TAMPON	
8	5172	1	PASSE-CABLE. CAOUCHTOUC	
9	3001427	1	PRESSE-ETOUPE	
10	G181419	1	BOUCHON 2300/2500/2700	
11	3400819	1	ROBINET DE PURGE 1/2 INCH	
12	107318000	2	MAMELON A VIS INT - EXT	
13	1801075	2	ANNEAU DE JOINT	
14	101609437	2	BAGUE CONIQUE 8MM	
15	3817582	1	CONTACT A NIVEAU	
16	107318107	1	RESERVOIR DE CHAUDIERE SOLAR E	
17	107318108	2	SUPPORT	
18	107318109	1	JOINT TORIQUE 53.57X3.53 NITRIL 70 SH	[1]
19	107318110	1	RESISTANCE CHAUFFANTE 18KW	[1]
19	107318178	1	RESISTANCE 18KW 440V	[1]
20	107318111	1	CABLE	[1]
21	107318112	1	SUPPORT	
22	107318113	1	BRACKET FOR FEED PUMP	
23	1814706	4	VIS	
24	1813807	4	RONDELLE	
25	107318067	1	POMPE 1X230 UP20-45 N150	
26	103821954	2	JOINT	[2]
27	101609354	1	RACCORD	
28	101609357	2	ECROU	
29	101609353	1	RACCORD COUDE	
30	107312000	1	RACCORD	
33	2377	1	SCR DOERR 19 A03515 24	
34	1800341	1	ECROU 3/4"	
35	1810191	2	COLLIER DE SERRAGE INOX	
36	106408242	1	TUBE DE 2M -5/8	
37	107318097	1	SUPPORT	
38	101118279	1	KIT THERMOSTAT 0-85	[3]
39	101118278	1	KIT THERMOSTAT DE SECURITE 97 DEG 6K	[4]
40	107318173	1	PLAQUE	[5]
41	101118283	1	BRACKET KIT FOR HEATING TANK	[6]

Part Notes:

- [1] - 2 pcs. 36H, 3 pcs. 54H
- [2] - GUARANTEE DATE EXPIRED
- [3] - MI - Thermostat

TSB-PPW-2017-010 SH SOLAR E, Thermostat Installation Instruction

DE TSB-PPW-2017-010 SH SOLAR E Neue Installationsanweisung Sicherheitsth...

FR TSB-PPW-2017-010 SH SOLAR E Instruction pour thermostat

- [4] - TSB-PPW-2017-010 SH SOLAR E, Thermostat Installation Instruction

DE TSB-PPW-2017-010 SH SOLAR E Neue Installationsanweisung Sicherheitsth...


FR TSB-PPW-2017-010 SH SOLAR E Instruction pour thermostat

- [5] - TSB-PPW-2011-008 Bracket for Heating Tank

- [6] - TSB-PPW-2017-019 SH SOLAR 7P E, Cracks in heating tank

FR TSB-PPW-2017-019 SH Solar 7P E fissure de la chaudière

DE TSB-PPW-2017-019 SH SOLAR 7P E, Risse in Heiztank

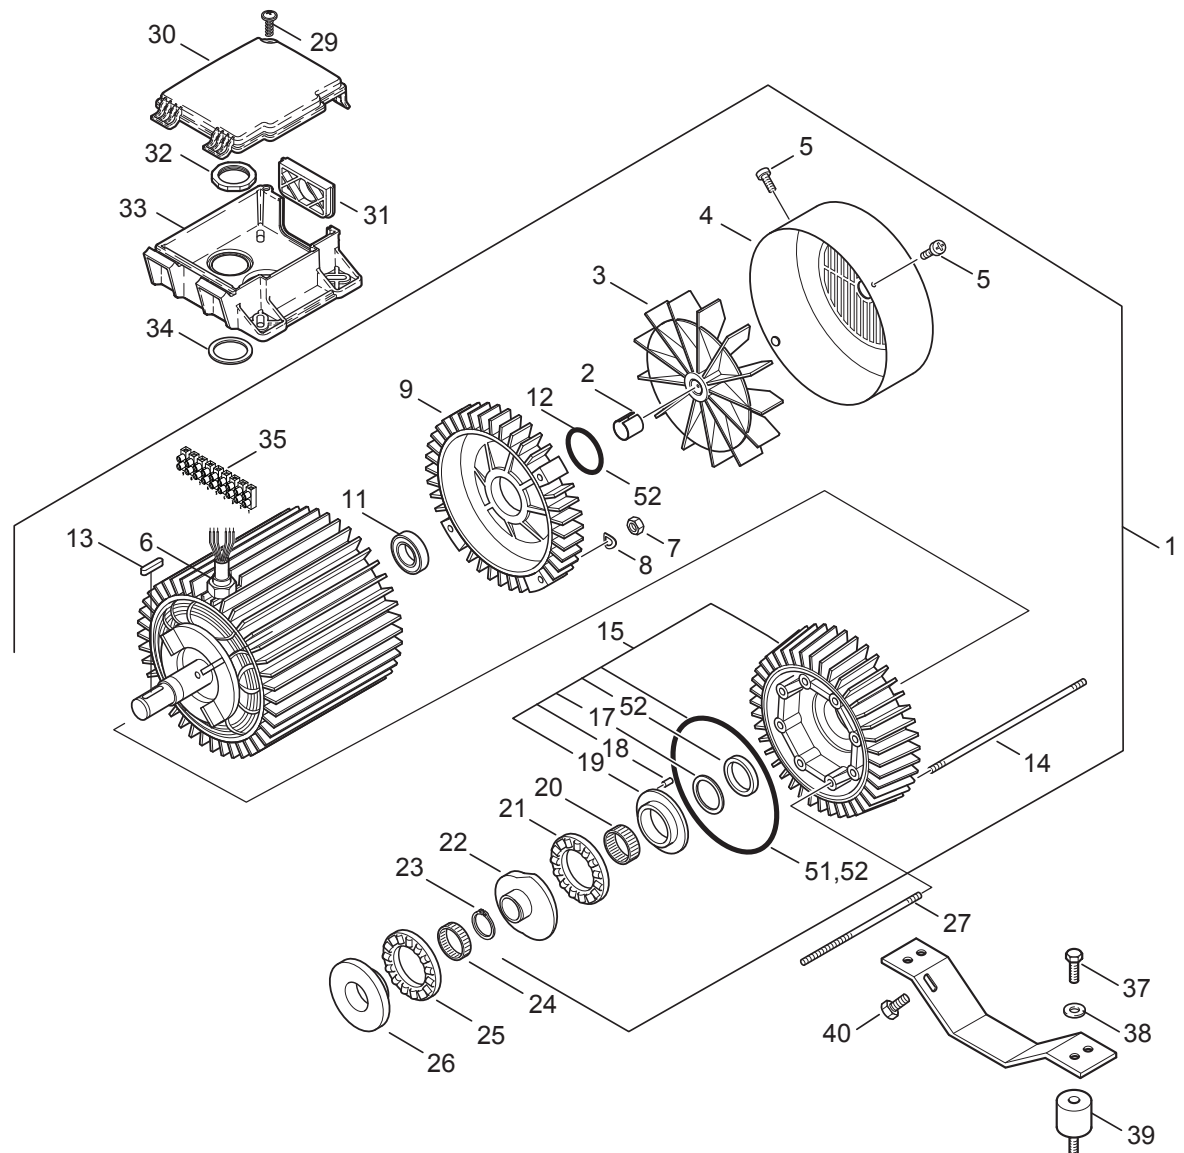

Pos.	Réf article	Qté	Désignation	Notes
1	107300130	1	MOTEUR 6.5KW 230V/440V/50HZ/3PH	[1]
1	107310070	1	MOTEUR	[2]
1	107310072	1	MOTOR 5.5KW 400-415.230/3/50	[3]
1	107310071	1	MOTOR 5.5KW 400-415.230/3/50	[4]
2	1802503	1	CIRCLIP	
3	107142275	1	HELICE DE VENTILLATION AVEC CLIPS	[5]
3	6100607	1	VENTILATEUR 4203V	[6]
4	107142276	1	CAPOT POUR HELICE DE VENTILATION	[5]
4	31001316	1	CARTER PROTECTION D HELICE MOTEUR	[7]
5	101814693	4	VIS M4X8	
7	2758	4	ECROU M8	
8	1801182	4	RONDELLE RESSORT	
9	6100611	1	FLASQUE ARRIERE MOTEUR	[8]
9	107140617	1	COUVERCLE ARRIERE DE STATOR DE POMPE	[9]
9	107142277	1	CARTER MOTEUR COTE HELICE VENTILLATION	[5]
11	3200623	1	ROULEMENT A BILLES	
11	31000149	1	ROULEMENT ARRIERE DE POMPE RF	[10]
12	107318244	1	JOINT TORIQUE 51.6X2.4 NBR70	
13	3200672	1	CLAVETTE 6X6X32	
14	6100711	8	GOUJON L 261 MM	
14	6100712	8	GOUJON L = 306 MM	[11]
15	6101750	1	FLASQUE AVANT MOTEUR	[12]
15	107140615	1	KIT FASQUE AVANT MOTEUR AVEC ROULEMENT	[13]
17	6100995	1	RONDELLE	
18	6100996	1	GOUPILLE	
19	107120703	1	SUPPORT DE ROULEMENT	
20	3200656	1	ROULEMENT A AIGUILLES	
21	3200615	1	ROULEMENT A ROULEAUX	
22	107120708	1	DISQUE OBLIQUE 4	[14]
22	107120716	1	DISQUE OBLIQUE 12	[15]
22	107120714	1	DISQUE OBLIQUE 10	[16]
22	107120707	1	DISQUE OBLIQUE C3 4,91	[17]
23	1802511	1	ANNEAU SEEGER 28X1.2	
24	3200664	1	ROULEMENT A AIGUILLES	
25	3200615	1	ROULEMENT A ROULEAUX	
26	107120704	1	DISQUE D'APPUI PISTONS	[18]
27	6301368	8	GOUJON	
29	10028	1	VIS KA50X14	
30	301000782	1	COUVERCLE BOITIER ELEC 128.2 X 112.5	
31	17106	1	COUVERCLE	
32	20862	1	ECROU PLAT	
33	301000781	1	CADRE	
34	103004340	1	JOINT 1 POUCE	
35	101117839	1	BORNIER	
37	1803089	4	SCREW INSEX M8X12	
38	1800317	4	RONDELLE	
39	107318091	4	SILENT-BLOC MOTEUR	
40	1802651	2	VIS M10X20	
51	1119820	1	KIT JOINT D'HUILE	
52	1119570	1	KIT JOINT EAU & HUILE	

Part Notes:

- [1] - SH SOLAR 7P-170/1200 E18 440/3/60 EXPT
- [2] - 7-58D / 170/1200D
7-58E / 170/1200E
7-58G / 170/1200G7-66D (DISC no. 12)TSB-PPW-2011-013 C3 Pump information
- [3] - 7-38E / 135/875E (DISC no. 3)
- [4] - 7-52GH / 150/1100GH(DISC no. 10)


-
- [5] - RF – has Nilfisk letter on the motor type plate
 - [6] - EME with 2 holes EME – has EME letter on the motor type plate
 - [7] - EME – has EME letter on the motor type plate
 - [8] - Up to week 32 2009 (ATB)
STOCK COVERS GUARANTEE
 - [9] - STOCK COVERS GUARANTEE

 - From week 32 2009 EME – has EME letter on the motor type plate
 - [10] - RF - has Nilfisk letter on the motor type plate
 - [11] - GUARANTEE DATE EXPIRED
 - [12] - Up to week 32 2009 (ATB) - TSB-PPW-2011-013 C3 Pump informationTSB-PPW-2011-013 C3 Pump information
 - [13] - From week 32 2009 RF – has Nilfisk letter on the motor type plateTSB-PPW-2011-013 C3 Pump information
 - [14] - 5,5kW 440,220/3/60
TSB-PPW-2019-007 C3 NA6 Wobble Disc and Bearing Track surface hardening change
 - [15] - TSB-PPW-2019-007 C3 NA6 Wobble Disc and Bearing Track surface hardening change

 - 6,5kW 400,230/3/50
 - Machine no. 107370070, 107370077
 - Machine no. 107370270, 107370274, 10737276
 - Machine no. 107370470
 - [16] - TSB-PPW-2019-007 C3 NA6 Wobble Disc and Bearing Track surface hardening change

 - 5,5kW-1030 400,230/3/50
 - Machine no. 107370495
 - [17] - TSB-PPW-2019-007 C3 NA6 Wobble Disc and Bearing Track surface hardening change


 - 5,5kW-810 400,230/3/50
 - Machine no. 107370260
 - [18] - TSB-PPW-2019-007 C3 NA6 Wobble Disc and Bearing Track surface hardening change
-

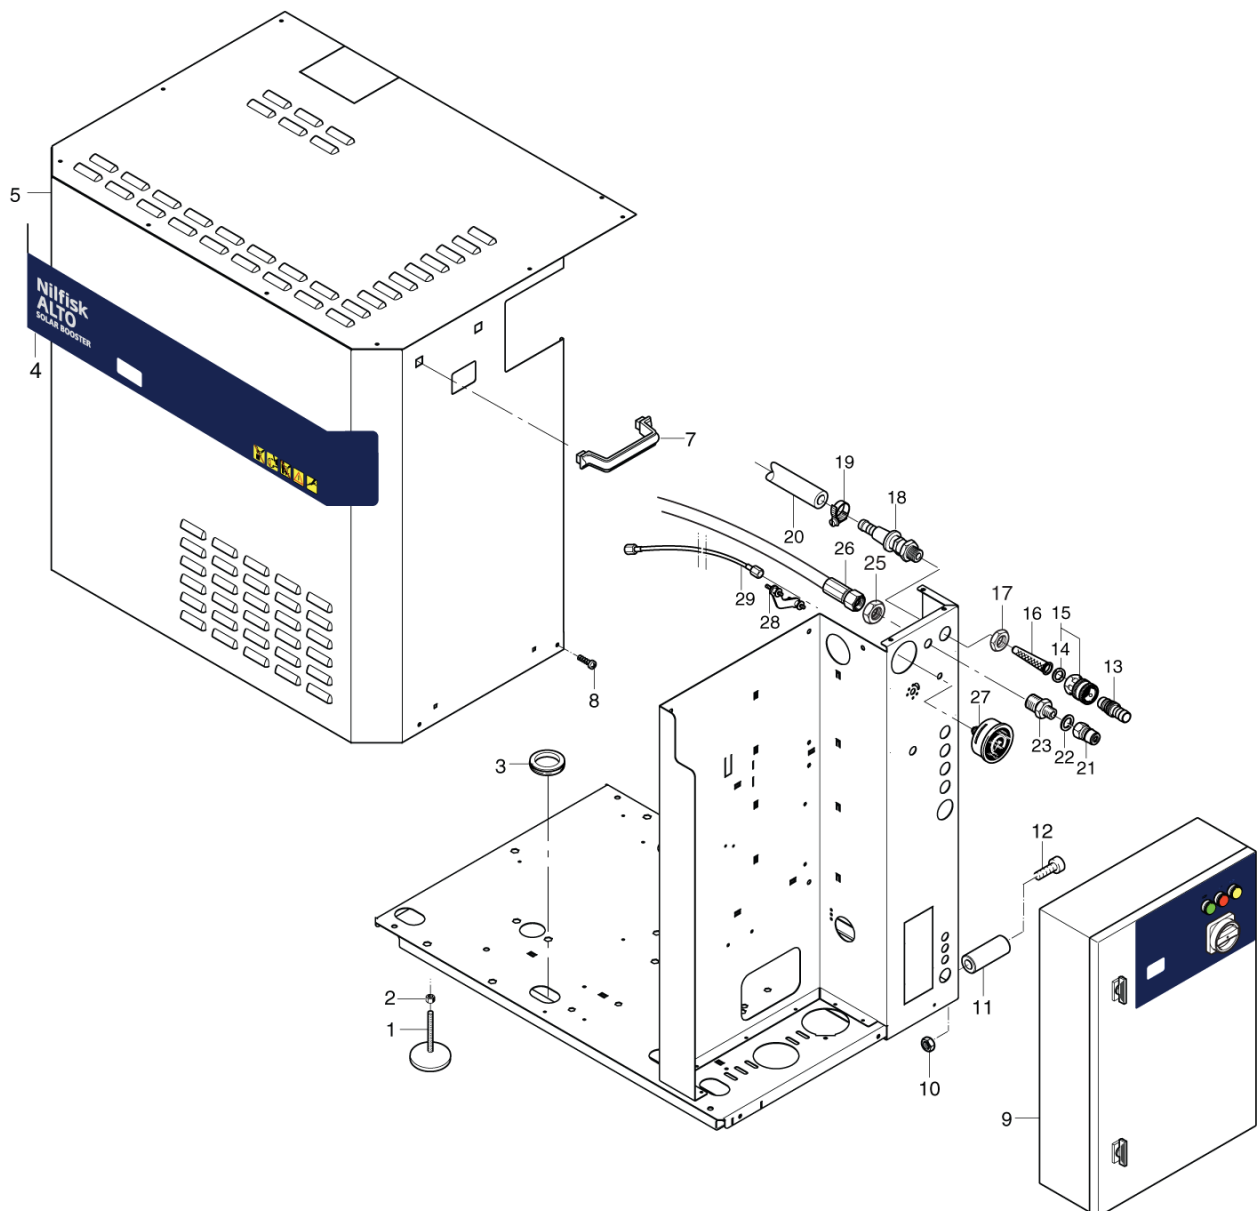

Pos.	Réf article	Qté	Désignation	Notes
01	104601172	4	PIED DE SOLAR D. 60 M12X70	
02	1810068	4	ECROU M12 INOX	
03	103004331	5	MANCHETTE	
04	107319001	1	AUTOCOLLANT	
05	107318078	1	CARTER POUR SOLAR D/EH	
07	107318079	1	POIGNEE DE CARTER MACHINE	
08	107143307	5	VIS M5X16 A2 ECO-FIX FORM H	
09		1	El-box	[1]
10	1801905	3	ECROU M8	
11	107318080	3	SPACER	
12	1812296	3	VIS	
13	1600659	1	RACCORD RAPIDE NITO 3/4"M 19MM	
14	3001237	1	JOINT	
15	1602945	1	RACCORD RAPIDE NITO 3/4"F	
16	6100941	1	FILTRE	
17	1800341	1	ECROU 3/4"	
18	6100937	1	PIÈCE DE RACCORDEMENT	
19	1810191	2	COLLIER DE SERRAGE INOX	
20	106408242	1	TUBE DE 2M -5/8	
21	1603101	1	COUPLEUR RAPIDE M 3/8 INOX	
22	1801075	1	ANNEAU DE JOINT	
23	6200484	1	RACCORD FILETE	
24	1810076	1	RONDELLE EVENTAIL	
25	1803220	1	CONTRE-ECROU M18X1.5	
26	107318088	1	FLEXIBLE HP DN8	
27	3600301	1	MANOMETRE	
28	1808088	1	PIECE DE SERRAGE	
29	102406647	1	TUBE MANOMETRE	

Part Notes:

- [1] - El-box
See Electric parts 18H or Electric parts 36H, 54H

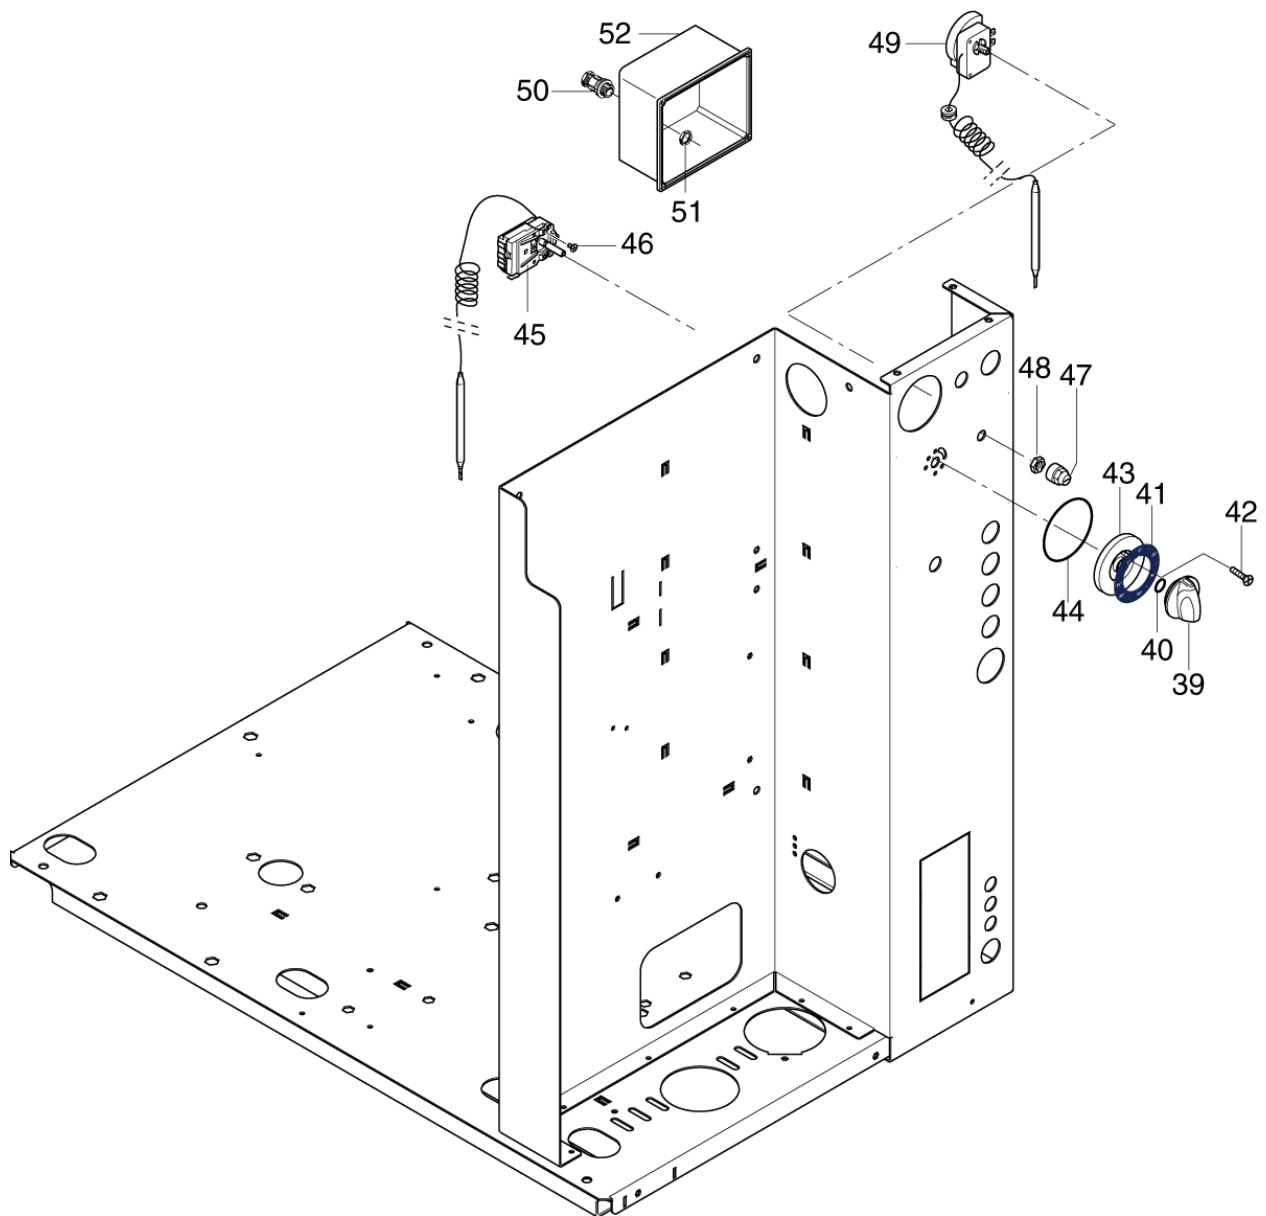

Pos.	Réf article	Qté	Désignation	Notes
39	909100204	1	BOUTON TOURNANT 6X5 BLUE	
40	9868	1	JOINT TORIQUE 10.2X2.5 NBR 70	
41	107319071	1	AUTOCOLLANT	
42	1801612	2	VIS M4X6	
43	107313045	1	EMBASE COMPLETE	
44	3001443	1	JOINT TORIQUE	
45	101118279	1	KIT THERMOSTAT 0-85	[1]
46	1801612	2	VIS M4X6	
47	34970	1	BOUCHON	
48	47313	1	ECROU	
49	101118278	1	KIT THERMOSTAT DE SECURITE 97 DEG 6K	[1]
50	103821788	1	RACCORD FILETE	
51	103821789	1	ECROU	
52	107318085	1	COVER FOR EL-BOX SOLAR E	

Part Notes:

[1] - MI - Thermostat

TSB-PPW-2017-010 SH SOLAR E, Thermostat Installation Instruction

DE TSB-PPW-2017-010 SH SOLAR E Neue Installationsanweisung Sicherheitsth...

FR TSB-PPW-2017-010 SH SOLAR E Instruction pour thermostat

No Diagram Available


Parts List Only

Pos.	Réf article	Qté	Désignation	Notes
0A	64314	1	KIT DE RÉPARATION POUR PISTON DISTRIBUTE	[1]
0A	1119570	1	KIT JOINT EAU & HUILE	[1]
0A	1119820	1	KIT JOINT D'HUILE	[1]
0A	301000905	1	PISTON	[1]
0A	3812385	1	FUSIBLE FIN 6,3 A	[1]
0A	1119571	1	KIT JOINT D'EAU REDUIT	[1]
0A	56519	1	JOINT TORIQUE 6.5 X3.0	[1]
0A	301001195	1	KIT DE RÉPARATION BLOC DE RÉGLAGE ET DE	[1]
0A	1119820	1	KIT JOINT D'HUILE	[1]
0A	1119570	1	KIT JOINT EAU & HUILE	[1]
0A	5218433	1	HUILE ALPHASYN T150 - 1 LITRES	[1]
0A	6100941	1	FILTRE	[1]
0A	1119195	1	KIT CLAPETS	[1]
0A	63056	1	KIT DE RÉPARATION BLOC DE RÉGLAGE ET DE	[1]
0B	63871	1	VALVE FLOTTEUR	[2]
0B	107318091	1	SILENT-BLOC MOTEUR	[2]
0C	107318096	1	DISJONCTEUR 3P 32A 10KA	[3]
0C	103821847	1	TRANSFORMATEUR	[3]
0C	101406030	1	FLEXIBLE HP 1M DN8	[3]
0C	103823032	1	AUXILIARY CONTACT 140MT-C-AFAR10A01	[3]
0C	107120701	1	CORPS DE CLAPET	[3]
0C	3200656	1	ROULEMENT A AIGUILLES	[3]
0C	103821899	1	CONNEXION	[3]
0C	107120714	1	DISQUE OBLIQUE 10	[4]
0C	107120716	1	DISQUE OBLIQUE 12	[4]
0C	103822306	1	CONTACTEUR 24V POUR MONOPH. CJX2-D18-B7	[3]
0C	101118279	1	KIT THERMOSTAT 0-85	[3]
0C	107318088	1	FLEXIBLE HP DN8	[3]
0C	1802511	1	ANNEAU SEEGER 28X1.2	[3]
0C	3600301	1	MANOMETRE	[3]
0C	301000731	1	INTERRUPTEUR	[3]
0C	107120707	1	DISQUE OBLIQUE C3 4,91	[4]
0C	103822317	1	CONTACTEUR CJX2-D32-B7 24	[3]
0C	6301166	1	PISTON CERAMIQUE	[3]
0C	301002458	1	RELAIS REED	[3]
0C	107140615	1	KIT FASQUE AVANT MOTEUR AVEC ROULEMENT	[3]
0C	103821898	1	DISJONCTEUR 10-16A	[3]
0C	3200664	1	ROULEMENT A AIGUILLES	[3]
0C	107310070	1	MOTEUR	[3]
0C	3817582	1	CONTACT A NIVEAU	[3]
0C	103821846	1	TRANSFORMATEUR 400V 24/19	[3]
0C	107120704	1	DISQUE D'APPUI PISTONS	[4]
0C	107120708	1	DISQUE OBLIQUE 4	[4]
0C	106420051	1	CIRCUIT IMPRIME	[3]
0C	101118278	1	KIT THERMOSTAT DE SECURITE 97 DEG 6K	[3]
0C	107310072	1	MOTOR 5.5KW 400-415.230/3/50	[3]
0C	3200615	1	ROULEMENT A ROULEAUX	[3]
0C	301000616	1	RESERVOIR AVEC JAUGE DE NIVEAU HUILE	[3]
0C	107318110	1	RESISTANCE CHAUFFANTE 18KW	[3]
0C	107310071	1	MOTOR 5.5KW 400-415.230/3/50	[3]
0C	6101750	1	FLASQUE AVANT MOTEUR	[3]
0C	3821748	1	BOUTON AUXILIAIRE	[3]
0C	6100602	1	FLAQUE AVANT POMPE	[3]
0C	107146583	1	MONEY SLOTH LOCK 24V-DC SPPT	

Part Notes:

- [1] - A
- [2] - B
- [3] - C


[4] - C
TSB-PPW-2019-007 C3 NA6 Wobble Disc and Bearing Track surface hardening change

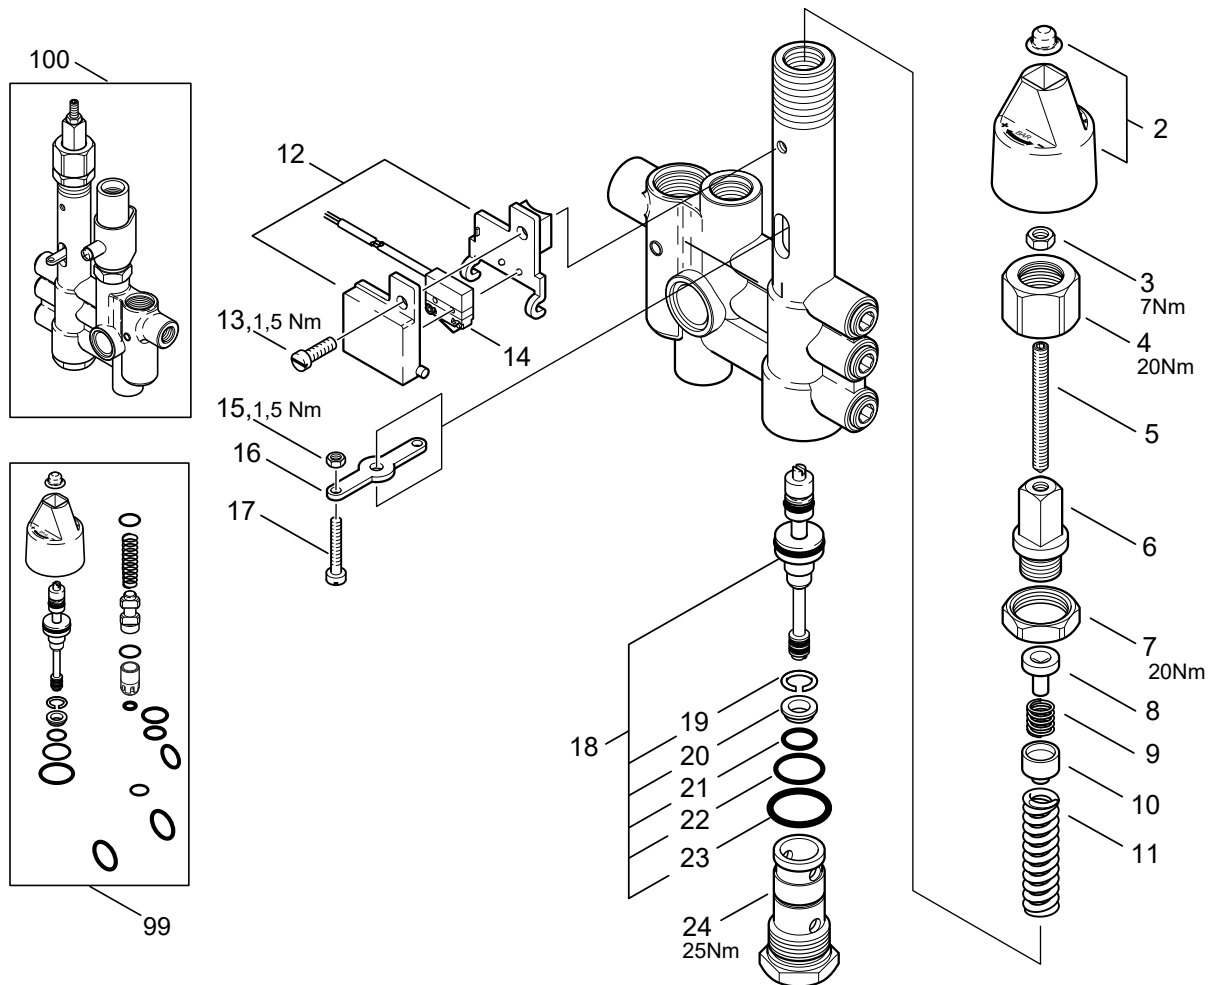

Pos.	Réf article	Qté	Désignation	Notes
100	301000903	1	BLOC DE RÉGLAGE ET DE SÉCURITÉ	[1]
2	62397	1	BOUTON	[2]
3	3136	1	ECROU M6	[3]
4	62710	1	ÉCROU-CHAPEAU	[3]
5	62711	1	TIGE FILETÉE M6X60	[3]
6	62712	1	VIS CREUSE	[3]
7	62696	1	ECROU HEX M24X1.5X6	[3]
8	62695	1	SUPPORT DE RESSORT	[3]
9	62713	1	RESSORT	[3]
10	62694	1	SUPPORT DE RESSORT	[3]
11	40972	1	RESSORT	[3]
12	62401	1	SUPPORT	
13	3349	1	VIS M5X16	
14	301000731	1	INTERRUPTEUR	
15	2759	1	ECROU M4 ISO 4032-8 ZN	
16	62717	1	LEVIER	[3]
17	101117739	1	VISHÉX M4X22-8.8 A2K DIN912	
18	64314	1	KIT DE RÉPARATION POUR PISTON DISTRIBUTE	[4]
19	909100001	1	BAGUE FENDUE D14	[4]
20	62708	1	BAGUE DE LOGEMENT DE SOUPAPE	[4]
21	49461	1	JOINT TORIQUE 11.0X1.5	[4]
22	9523	1	JOINT TORIQUE 17.0X1.5	[4]
23	32091	1	JOINT TORIQUE 21.0X2.0	[4]
24	64301	1	VIS CREUSE	[3]
99	301001195	1	KIT DE RÉPARATION BLOC DE RÉGLAGE ET DE	

Part Notes:

- [1] - 250BAR
- [2] - part of pos. 99
- [3] - part of pos. 100
- [4] - part of pos. 99 and 100

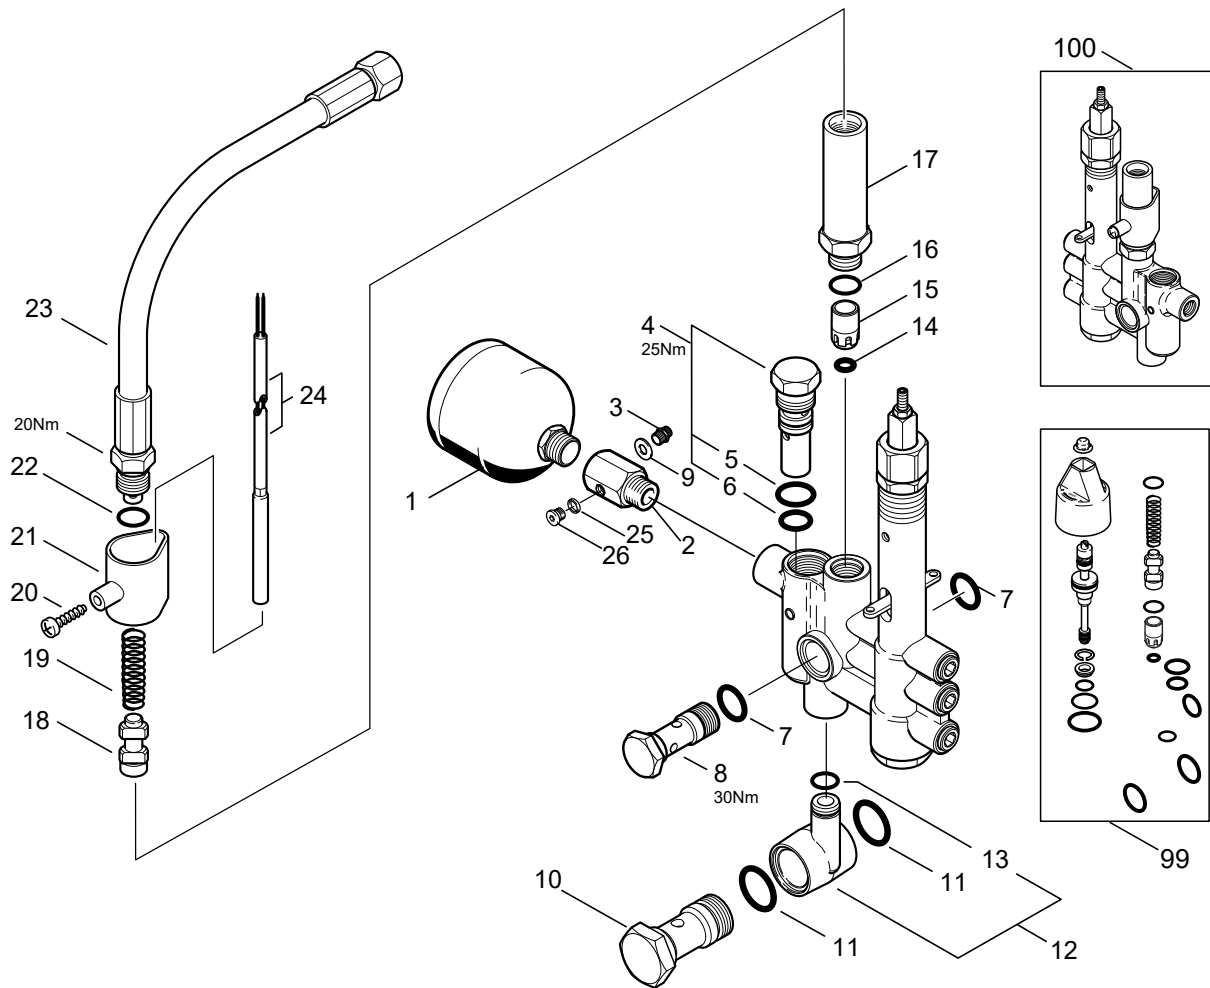

Pos.	Réf article	Qté	Désignation	Notes
100	301000903	1	BLOC DE RÉGLAGE ET DE SÉCURITÉ	[1]
1	63090	1	RÉSERVOIR HYDRAULIQUE	
2	107312001	1	ECROU	
3	1821	1	RACCORD XGE 6LR1/8	
4	301000911	1	SOUPAPE DE SÉCURITÉ	
5	16443	1	JOINT TORIQUE 17.0X2.0	[2]
6	62706	1	JOINT TORIQUE 13.0X2.0	[2]
7	16443	2	JOINT TORIQUE 17.0X2.0	[2]
8	62697	1	VIS CREUSE	
9	101814735	1	ANNEAU DE JOINT	
10	107121503	1	VIS BANJO	
11	24347	2	JOINT TORIQUE 21.0X2.5	[2]
12	63058	1	RACCORD	
13	13739	1	JOINT	[2]
14	56519	1	JOINT TORIQUE 6.5 X3.0	[3]
15	301000905	1	PISTON	[3]
16	16998	1	JOINT TORIQUE 14.0X1.5	[3]
17	62722	1	GUIDE-PISTON	[4]
18	63538	1	PISTON	[2]
19	6231	1	RESSORT	[2]
20	10028	1	VIS KA50X14	[5]
21	62399	1	SUPPORT	[6]
22	62706	1	JOINT TORIQUE 13.0X2.0	[2]
23	101406030	1	FLEXIBLE HP 1M DN8	
23	106268111	1	TUYAU HP DN10 L825MM	[7]
24	301002458	1	RELAIS REED	
25	101814735	1	ANNEAU DE JOINT	
26	4443	1	BOUCHON	
99	301001195	1	KIT DE RÉPARATION BLOC DE RÉGLAGE ET DE	

Part Notes:

- [1] - 250BAR
- [2] - part of pos. 99
- [3] - part of pos. 99 and 100
- [4] - part of pos. 100
- [5] - part of pos 100
- [6] - part of pos.100
- [7] - Before serial nb.: 3520242000567

